



**TROFEO GLASS
BALUSTRADE SYSTEM**

HOSET

TROFEO GLASS BALUSTRADE SYSTEM


HOSET

GLAZING IN HANDRAIL


GLAZING UNDER HANDRAIL

TOP MOUNTING

TR-1-1

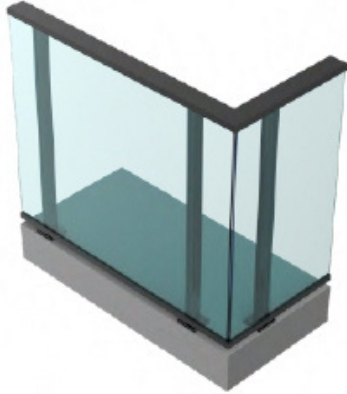


TR-2-1

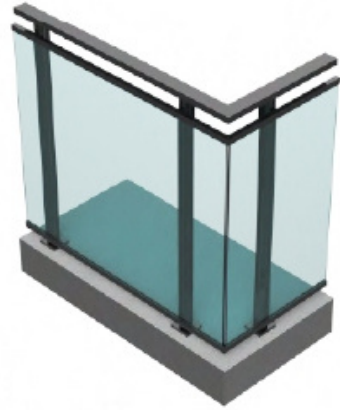


SIDE MOUNTING

TR-1-2

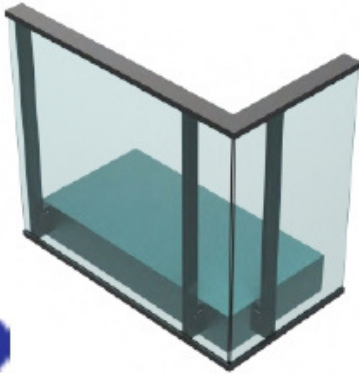


TR-2-2

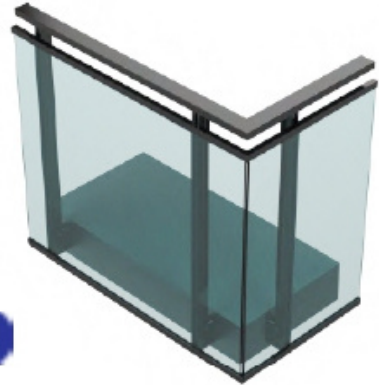


SIDE MOUNTING WITH ALUMINIUM BALCONY COVER

TR-1-3

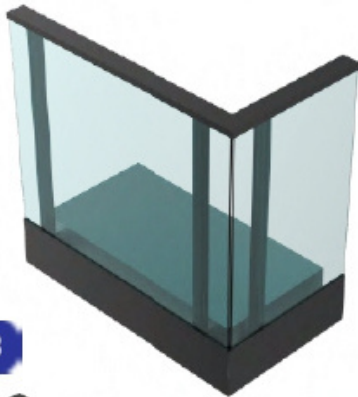


TR-2-3

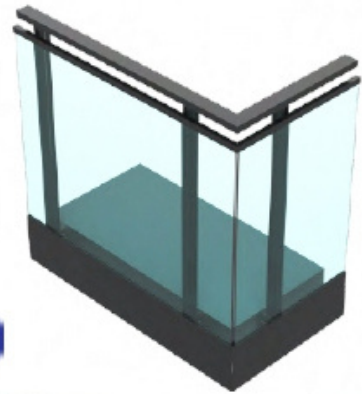

SIDE MOUNTING WITH GLASS BALCONY COVER

TR-1-4

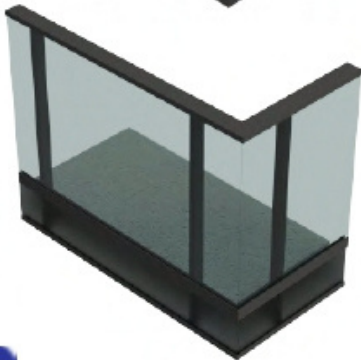

TR-2-4



CHOOSING YOUR HOME

TROFEO GLASS BALUSTRADE SYSTEM

TECHNICAL PARAMETERS


PROFILES AVAILABLE IN STOCK IN RAW ALUMINIUM OR RAL 7016. OTHER FINISHES ON REQUEST.
GUARANTEE 10 YEARS ON PAINTING SURFACE.

MAXIMUM DISTANCE BETWEEN POSTS - 1300 MM
MAXIMUM HEIGHT - 1200 MM (TOP MOUNTING) / 1300 MM (SIDE MOUNTING)
MAXIMUM LOAD 1.0 kN

GLASS INSTALLATION - VSG 44.2 / VSG ESG 44.2 / VSG 55.2 / VSG ESG 55.2

EXAMPLE TOP MOUNTING

EXAMPLE SIDE MOUNTING

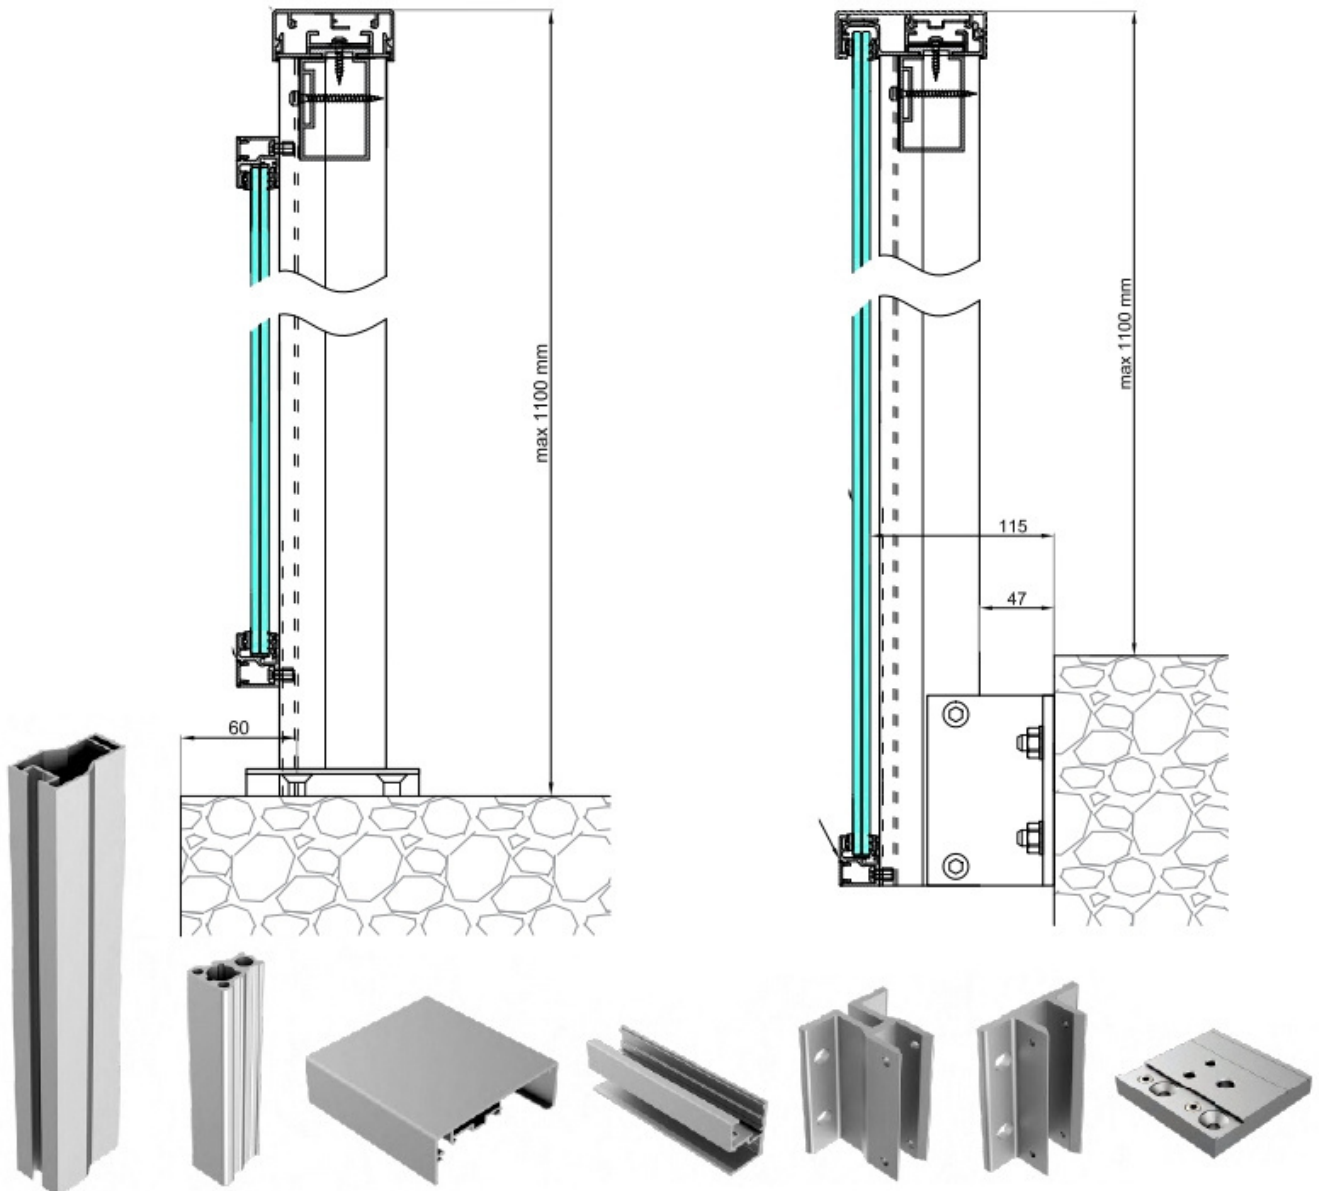

TROFEO GLASS BALUSTRADE SYSTEM

TOP MOUNTING

NB-6000P



SIDE MOUNTING

NB-6100P



NB-6200P



NB-6300P



TECHNICAL PARAMETERS

STANDARD FINISH
SILVER ANODIZED
OTHER FINISHES ON REQUEST.
GUARANTEE 10 YEARS ON
PAINTING SURFACE.

MAXIMUM HEIGHT - 1200 MM

GLASS INSTALLATION
VSG ESG 66.2 - 1010.4

MAXIMUM LOAD 1.0 kN
DEPENDS ON BALUSTRADE
CONFIGURATION

ACCESSORIES



COVERS



DRAINAGE PROFILES



HANDRAILS



TROFEO GLASS BALUSTRADE SYSTEM

SPIGOT



TECHNICAL PARAMETERS


MATERIAL SS 304

MAXIMUM HEIGHT - 1100 MM

GLASS INSTALLATION
VSG ESG 66.2 - 88.4

MAXIMUM LOAD 0.5 kN

HOLES IN GLASS NO NEEDED

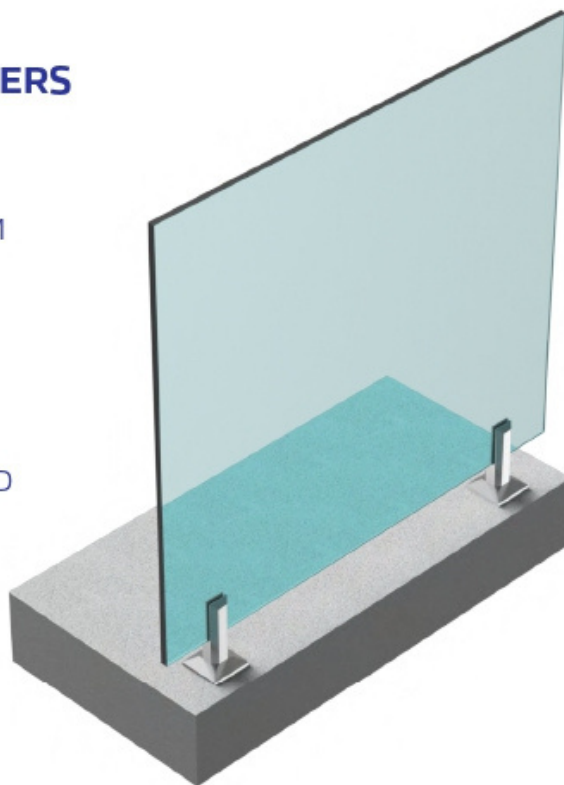

FRENCH BALCONY



TECHNICAL PARAMETERS

PROFILES AVAILABLE IN STOCK IN RAW ALUMINIUM OR RAL 7016. OTHER FINISHES ON REQUEST. GUARANTEE 10 YEARS ON PAINTING SURFACE.

MAXIMUM WIDTH - 1800 MM
MAXIMUM HEIGHT - 1200 MM

GLASS INSTALLATION
VSG ESG 66.2 - 88.4

MAXIMUM LOAD 1.0 kN



CONTACTS



044 744 1465



myynti@honet.fi



MiiA Rakennus Oy, Akerlundinkatu 11A, 33100 Tampere



Open: by appointment



Call center daily from 9:00 to 22:00



**TROFEO GLASS
BALUSTRADE SYSTEM**